



BT-860 EMERGENCY PUSH-BUTTON

SENGATE

BT-860-000 / BT-860-0L0 / BT-860-0LM / BT-860-00M / BT-860-200 / BT-860-2L0 / BT-860-2LM / BT-860-20M
BT-860-000F / BT-860-0L0F / BT-860-0LMF / BT-860-00MF / BT-860-200F / BT-860-2L0F / BT-860-2LMF / BT-860-20MF



BT-860-00M

BT-860-00MF



BT-860-2LMF



BT-860-2LM

EMERGENCY BUTTON WITH NEW STANDARDS

FEATURES

- OPTIONAL OPERATION TYPES: ONE-TOUCH, TWO-STEP, FLUSH, SURFACE MOUNTS AND ALARM MEMORY.
- BUILD-IN MICRO SWITCH, PRECISE AND STABLE ON/OFF OPERATION.
- WITH MEMORY DEVICE TO DIAGNOSE THE ALARM LOCATION.
- BUILD-IN LED LIGHT, EASY OPERATION.
- ESTHETIC DESIGN, EASY TO MATCH UP DECORATION.


※ Patent is pending

ISO:9001


BT-860 EMERGENCY PUSH-BUTTON

BT-860-000 / BT-860-0L0 / BT-860-0LM / BT-860-00M / BT-860-200 / BT-860-2L0 / BT-860-2LM / BT-860-20M
 BT-860-000F / BT-860-0L0F / BT-860-0LMF / BT-860-00MF / BT-860-200F / BT-860-2L0F / BT-860-2LMF / BT-860-20MF

WITHOUT LED LIGHT SERIES

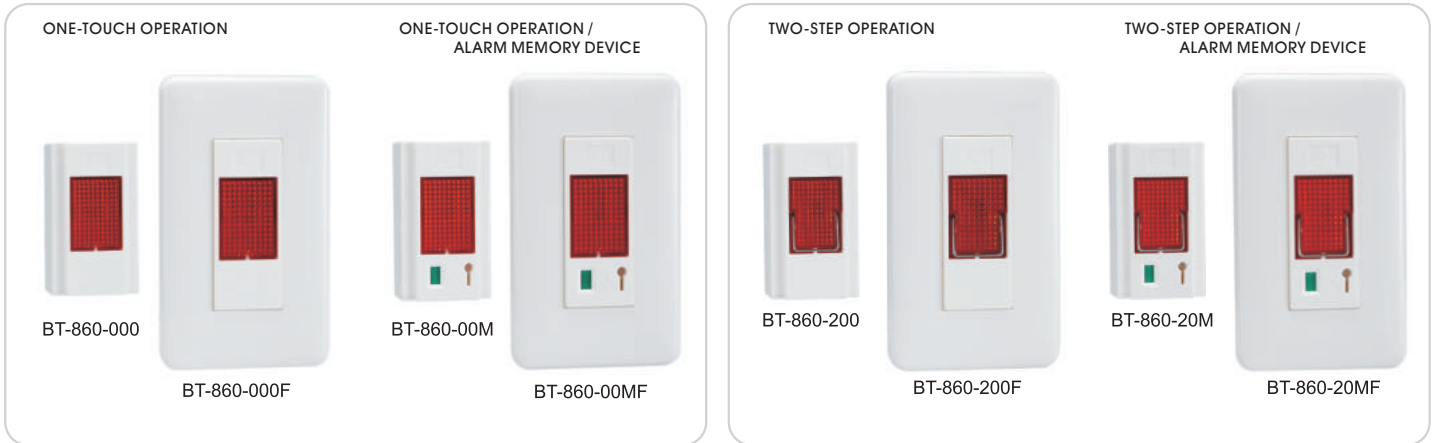

WITH LED LIGHT SERIES

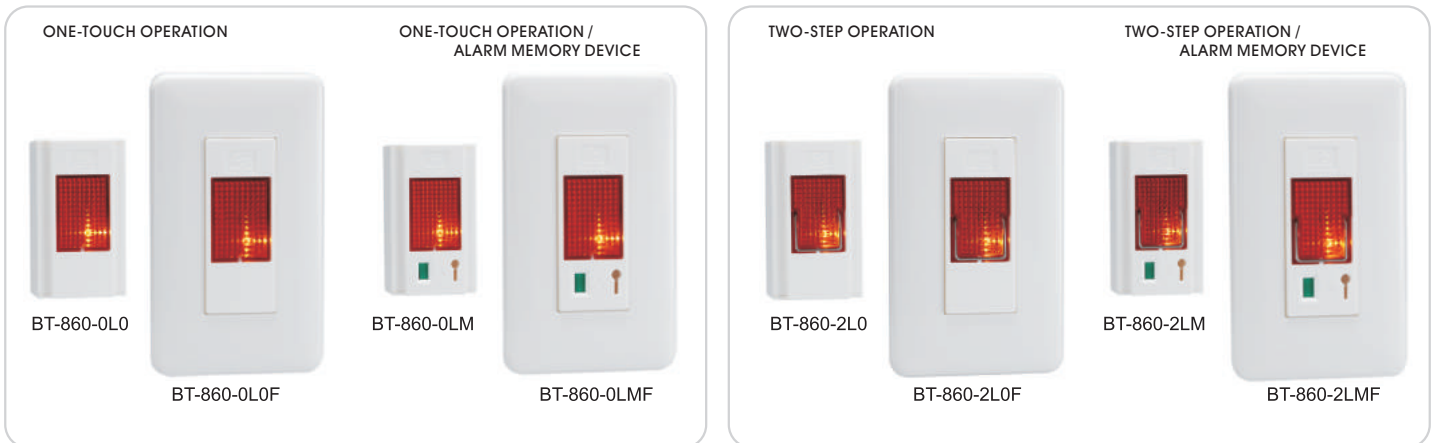


SPECIFICATION

MODEL	BT-860-2LM
Supply Voltage	10V~24VDC
Current Consumption (with LED Indicator)	5mA(DC12V , max) 10.5mA(DC24V , max)
Alarm Output	Dry connect relay, micro-switch, NC. / NO. 0.3A / 30VDC
Button Type	One-Touch, Two-Step Operation
LED Light	OFF-Yellow LED, ON-Red LED (With LED light)
Operating Temperature	-25° C~+55° C(-13° F~+131° F)
Environment Humidity	95%(MAX)
Wiring	Terminal
Mounting Position	Indoor-wall
Weight	34 grams
Dimensions	1.57" x 2.73" x 0.95" (40 X 69.2 X 24)
Accessories	Screws (3.5x20mm)-2 pcs
Accessories of Flush Mount	Flush-front-cover plate, Flush-mount pattern, Screws (4 x 20mm)-2 pcs

REMARKS:

- Being a part of alarm system, this unit is designed to activate an alarm control panel only.
- Please follow the instruction power supply and current spec, to prevent the damaging in the product.

DIMENSIONS

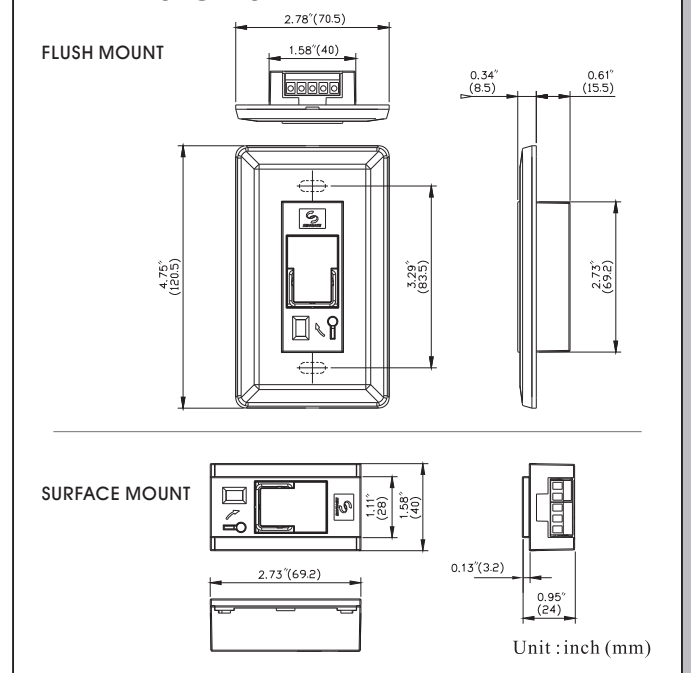

No.A052E17-02



Taiwan Security Net Co., Ltd. Designing / Manufacturing

Web Site : <http://www.sengate.com>