



TAUT WIRE FENCE SENSOR

PS-780 / PS-781 / PS-10 / PS-60 / PS-85



PS-60

PS-85

LED CALIBRATION

PS-780

PS-781

EFFECTIVE BARRIER | PREVENTIVE SECURITY

TAUT WIRE FENCE SENSOR

- BUILD-IN MICRO SWITCH, PRECISE AND STABLE ON/OFF OPERATION.
- ENHANCED MECHANICAL DESIGN, BETTER WATER-PROOF FUNCTION, BIGGER CONTACT POWER, LONGER PRODUCT LIFE.
- BUILD-IN LED CALIBRATION WINDOW, NO-POWER REQUIRED, CANNY INSPECTION-ADJUSTMENT.
- LIMITED-LOADING BREAKER · EFFICIENT INSTALLATION.

※ PATENT PENDING

ISO:9001



PS-10

PULL > 7.5 KG , LOADING BREAKER


TAUT WIRE FENCE SENSOR

PS-780 / PS-781 / PS-10 / PS-60 / PS-85

PS-780 (WALL-ATTACHED MOUNT)




PS-781 (HANGING MOUNT)

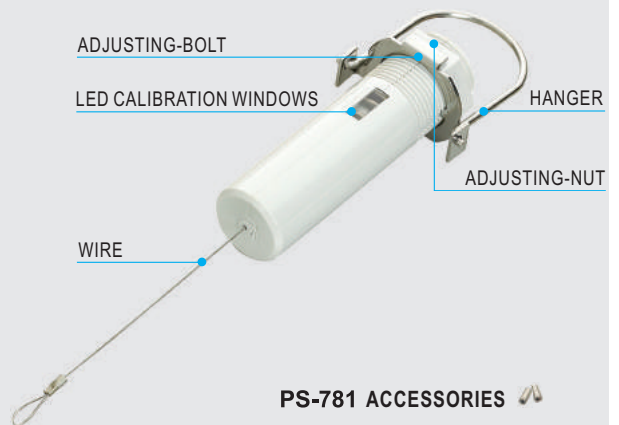


TAUT WIRE FENCE SENSOR		
P/NBR.	PS-780	PS-781
CONTACT POWER	NO-POWER CONTACT NC. 0.3A/30VDC NO. SERIES CONNECTION 4.7kΩ LED OUTPUT.	
SENSITIVITY LEVEL	2.5 ± 0.5 KGS	
MAX. LOADING	10 KGS	
DETECTION METHOD	MAGNETIC DETECTION	
OPERATION TEMP. RANGE	-25°C ~ +55°C	
IP RATING	IP68	
WEIGHT	113 GRAMS	96 GRAMS
DIMENSION	L119~141xW52.3xH38.3	L132~154xW58xH38.3
LED DIRECTOR	IF TWO OR MORE SENSORS ALARM-ACTIVATED, ONLY THE SENSOR NEAREST BY CONTROL PANEL, LED LIGHT-UP.	
ACCESSORIES	SCREWS (4X20) 4 PCS WIRE FIXER (P-1.25) 2 PCS BLOCK AND TACKLE-2 PCS WIRING-MOUNT	WIRE FIXER (P-1.25) 2 PCS

DIMENSIONS:

PS-780 (WALL-ATTACHED MOUNT)

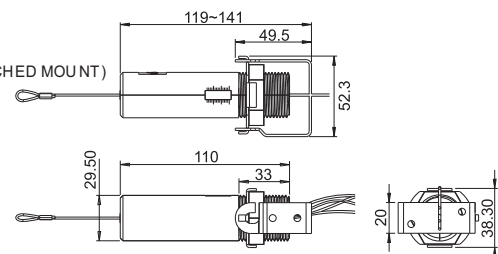


PS-781 (HANGING MOUNT)

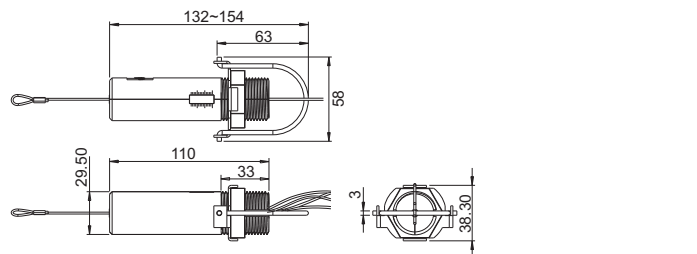

LIMITED-LOADING BREAKER(OPTIONAL)	
P/NBR.	PS-10
BREAKING WEIGHT	7.5 ± 0.5 KGS
BREAKING METHOD	MAGNETIC BREAKING
DIMENSION	L100xW25.1xH24.2
WEIGHT	43 GRAMS

DIMENSIONS: PS-10




TAUT WIRE POLE-STAND(OPTIONAL)		
P/NBR.	PS-60	PS-85
POLE SPEC	Ø32 x H595mm(T 0.9mm)	Ø32 x H830mm(T 1.2mm)
POLE-STAND ANGLE	45°	
INSTALLATION	3 TAUT WIRES	5 TAUT WIRES
DIMENSION	L248 x W595 x H150	L362 x W830 x H150
WEIGHT	1.10 KGS	1.50 KGS

DIMENSIONS:

PS-85

PS-60

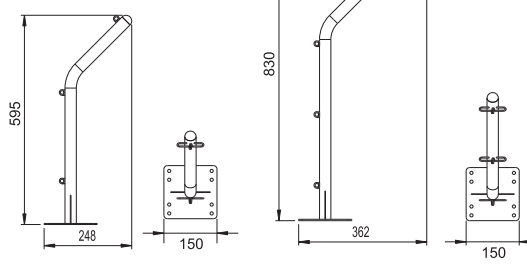

REMARKS:

- This unit is designed to detect an intruder and activate an alarm control panel. Being only a part of complete system, we cannot assume responsibility for theft or aging damages, should it occur.
- Follow the spec of voltage/current carefully and properly, to prevent product damaged.

No.A057E19-02



Taiwan Security Net Co., Ltd. Designing / Manufacturing

Web Site : <http://www.sengate.com>